


Tabella MAX RPM per rullini in gomma ad espansione centrifuga con gambo

MAX RPM limits for expanding rubber holders with shank

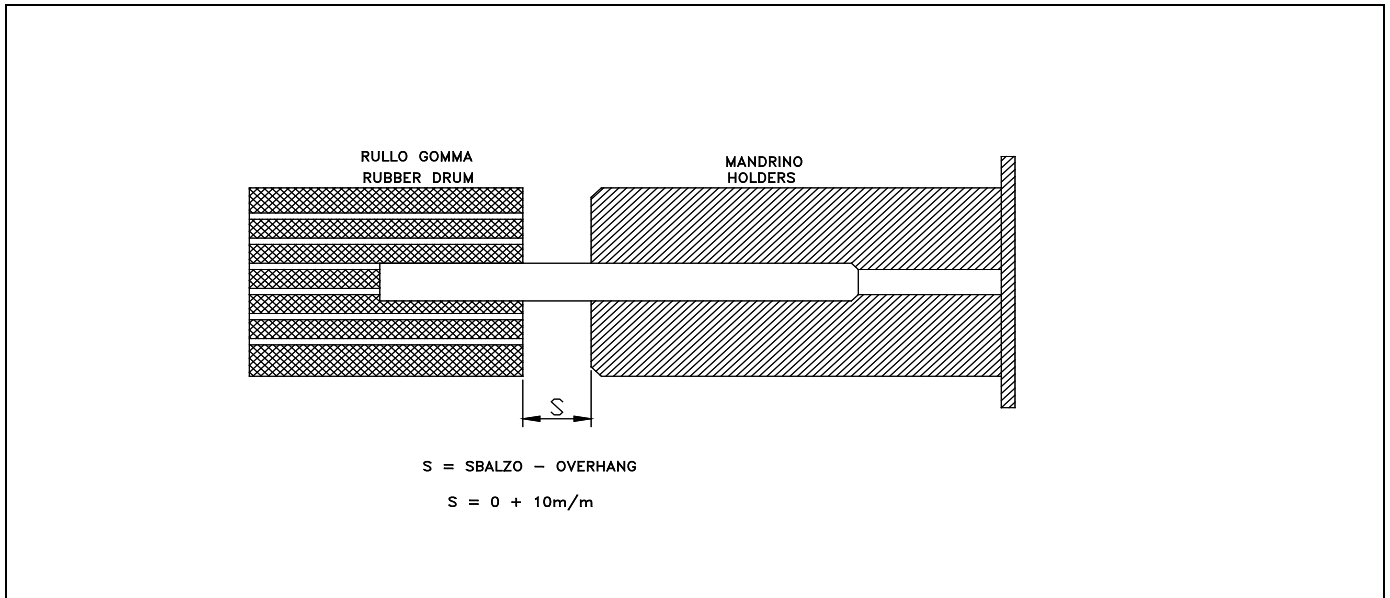

Dimensione_Type	MAX RPM	Dimensione_Type	MAX RPM
10X10X6	27000	30X30X6	20000
10X15X6	27000	35X30X6	15000
10X20X6	27000	38X25X6	15000
10X30X6	27000	45X30X6	12000
13X10X6	27000	51X25X6	8000
13X25X6	27000	60X15X6	8000
15X10X6	26000	60X30X6	8000
15X30X6	26000	60X50X6	7000
19X25X6	25000	75X30X8	5000
20X30X6	25000	100X40X8	4000
22X20X6	25000	20/14X63X6	15000
25X25X6	24000	29/22X30X6	20000
30X20X6	20000	36/22X60X6	6000
		38/24X63X6	6000

Attenzione : Non superare mai sbalzo 10mm. durante l'utilizzo – Non utilizzare porta-manicotti senza anello abrasivo
Do not exceed 10mm. Overhang during working – Do not use holders without abrasive belt